DFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 16 TOWNSHIP 14 RANGE 3

DATE: 6-13-04

PARTY CHIEF: Wilcoxen

CREW: TYPE OF MARKER: Horrison


METHOD OF ESTABLISHMENT: County: 8-17-99


IN. S.P.C. E ZONE, NAD 83

NAME: 14031602

N: 490302.4258(m)

E: 53719.1807(m)



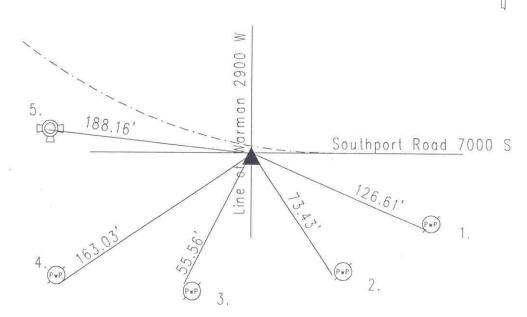

Original post set 1820 by Laughlin with witnesses: 18" buckeye N 57 E 12 links, 8" dogwood S 21 W 21 links per Marion County Atlas pq.5. Survey by Fatout 5-18-1880 indicates no stone nor witnesses per Perry Township Legal Survey Book pg. 58. Monroe 12-4-59 called a steel pin over stone 24 down. Miller 6-23-75 called an axle 5" down. Green 2-10-86 called the same. Greene 6-1-90 called a PK nail. Kiste 12-20-94 called a PK nail over an axle. Excavated by Kiste 8-17-99 and PK nail was found at surface. A 48" long steering rod fd 12" dn. Stone fd 36" dn with high point of stone agreeing with PK nail & steering rod. Harrison set. Re-tied 6-13-04 by Wilcoxen.

## HC 431602

REF.	DISTANCE	DESCRIPTION
l.	126.61	Mag nail w/brass washer SW/PwP#483-751 65" up
2.	73.43	Mag nail w/brass washer SW PwP#402-750 48"up
3.	55.56'	Mag nail w/brass washer W PwP#65T 568 750 48"up
4.	163.03	Mag nail w/brass washer S PwP # 401-750 36"up
5.	188.16	Top nut of fire hydrant
140		